



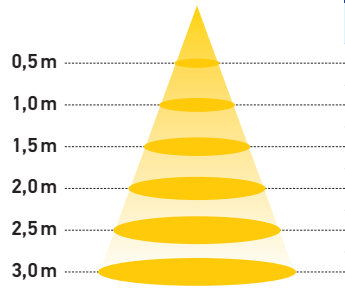

## Product card: G104 IP44

<b>1000 lm</b> LIGHT OUTPUT	<b>18W</b> POWER CONSUMPTION	<b>143-155MM</b> CUT OUT	<b>IP 44</b> PROTECTION CLASS	<b>85</b> CRI
--------------------------------	---------------------------------	-----------------------------	----------------------------------	------------------

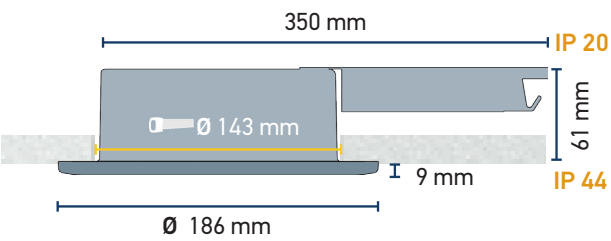

Luminous Intensity Distance / Lux 3000 K	
85°	
0,5 m	1m / 4100
1,0 m	2,1m / 1050
1,5 m	3,1m / 450
2,0 m	4,2m / 260
2,5 m	5,2m / 160
3,0 m	6,3m / 110

### OPTIONS

Beam angle	Color temp	Lens	Position of lens	Height of frame	Color of trim	Shape of trim	Connection Type	Connectors	Poles	Control
85	2700K	Concave	Recessed	60	White	Rounded	Single	Wago	3-pole	ON/OFF
	3000K	Flat	Surface		Chrome	Tapered	Extension	Ensto	5-pole	Phase cut
	4000K					Squared				1-10
										DALI
										DMX