



## Product card: S102i



**700 lm**  
LIGHT OUTPUT

**11W**  
POWER CONSUMPTION

**102mm**  
CUTOUT

**IP 23**  
PROTECTION CLASS

**90**  
CRI

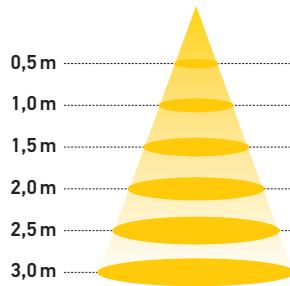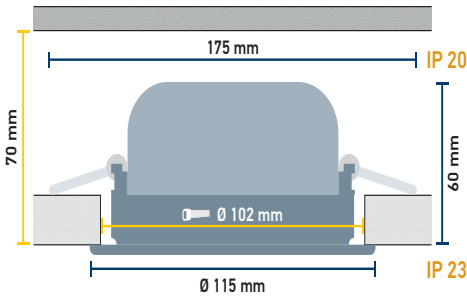

### Luminous Intensity Distance /Lux 3000 K

	60°	40°	15°
0,5m	0,6m / 2600	0,3m / 5200	
1,0m	1,1m / 650	0,7m / 1300	
1,5m	1,7m / 290	1,0m / 580	
2,0m	2,3m / 160	1,4m / 325	
2,5m	2,8m / 105	1,7m / 210	
3,0m	3,4m / 72	2,1m / 145	

### OPTIONS

Beam angle	Color temp	Fixing	Lens	Color of trim	Shape of trim	Connection Type	Connectors	Poles	Control
15	2700K	Spring	Clear	White	Round	Single	Wago	2-pole	ON/OFF
40	3000K		Diffused	Black	Square	Extension	Ensto	3-pole	Phase cut
60	4000K			Silver					
90				Anthracite					
				Aluminum					
				AISI316					