



Product card: S82 Tilt&Twist



800 lm
LIGHT OUTPUT

11W
POWER CONSUMPTION

82 mm
CUTOUT

IP 23
PROTECTION CLASS

90
CRI

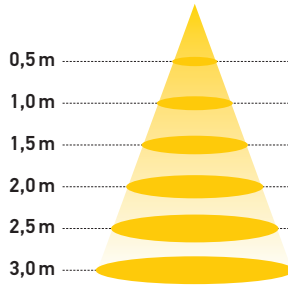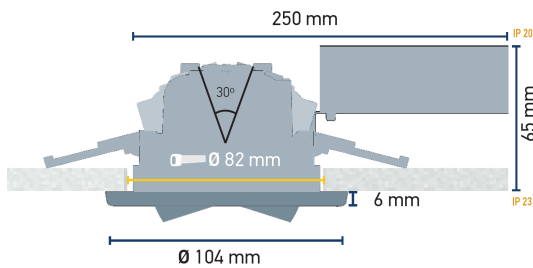

Luminous Intensity Distance / Lux 3000 K

	60°	40°	20°
0,5 m	0,6m / 3016	0,3m / 6116	0,2m / 21822
1,0 m	1,1m / 754	0,7m / 1529	0,4m / 5456
1,5 m	1,7m / 335	1,0m / 680	0,6m / 2425
2,0 m	2,3m / 189	1,4m / 382	0,8m / 1364
2,5 m	2,8m / 121	1,7m / 245	1,0m / 873
3,0 m	3,4m / 84	2,1m / 170	1,2m / 606

OPTIONS

Beam angle	Color temp	Fixing	Lens	Color of framework	Color of trim	Connection Type	Connectors	Poles	Control
20	2700K	Screws	Clear	White	White	Single	Wago	2-pole	ON/OFF
40	3000K	Elevator	Diffused	Black	Black	Extension	Ensto	3-pole	Phase cut
60	4000K				Chrome			5-pole	1-10
90					Gold				DALI
					Painted				DMX
									24V/PVM